

LPMS-UTTTL3



LPMS Wired Miniature Motion Sensor / IMU / AHRS with TTL and USB Connectivity

The LPMS-UTTTL3 is an innovative and high-performance miniature motion sensor.

Integrating TTL and USB interfaces into one unit, the LPMS-UTTTL3 perfectly fits to both machine and human motion measurements for size and cost sensitive applications.





Key Feature

- MEMS miniature inertial measurement unit (IMU)
- Integration of 3-axis gyroscope, accelerometer, magnetometer, temperature and barometric pressure sensor in one unit
- Real-time, on-device calculation of sensor orientation, linear acceleration and altitude
- Data output rates of up to 500Hz
- Variety of wired interfaces: TTL and USB
- Control applications and SDK for Windows, Linux -

Applications

- Manipulator balance control
- Internet of Things (IoT) devices
- Autonomous mobile robot navigation
- Robot arm control


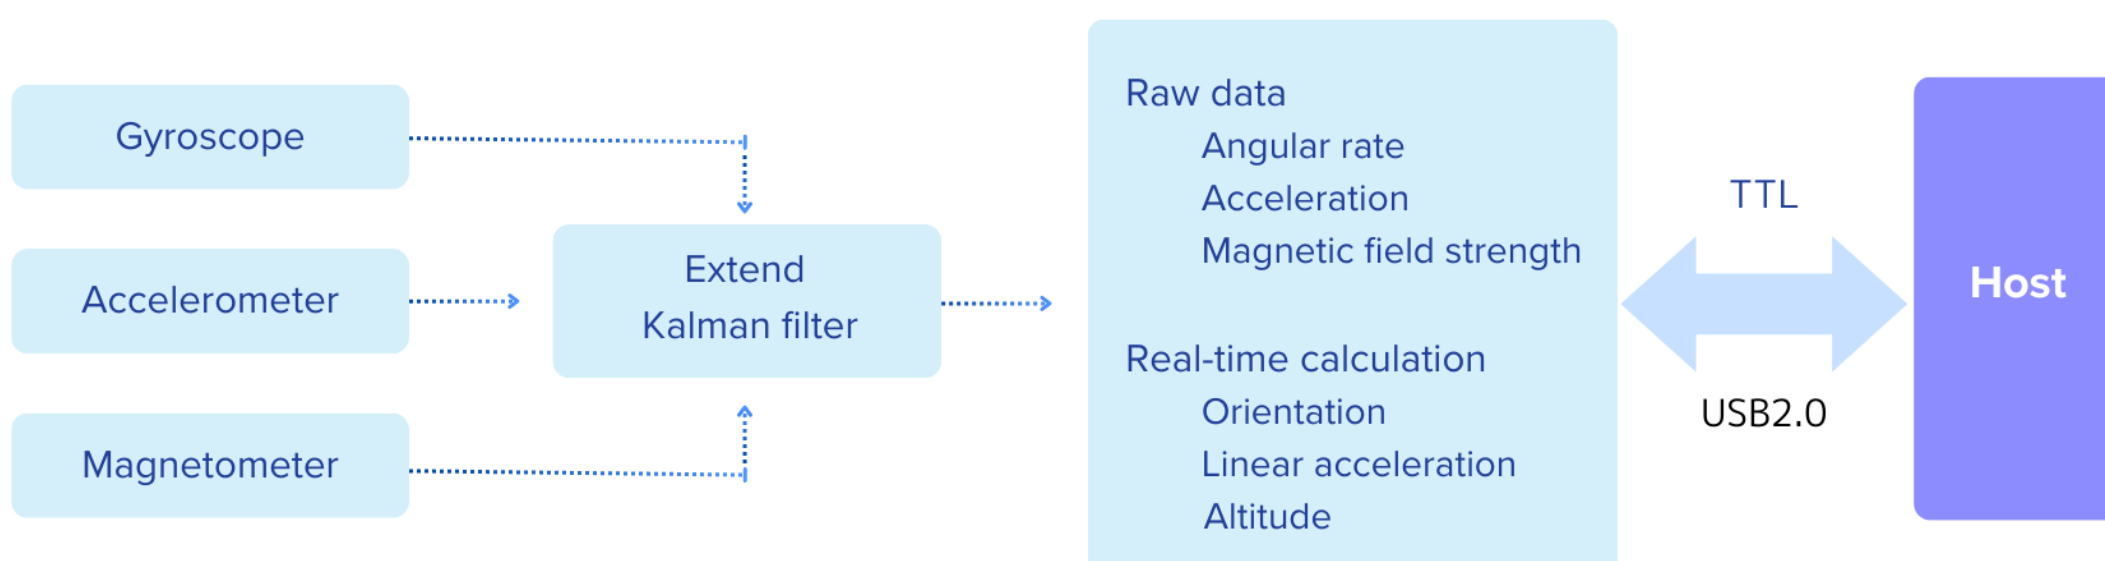


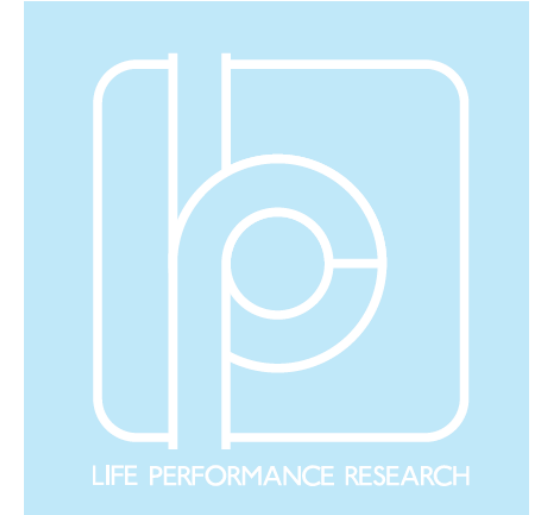

Specification

Part Number	LPMS-UTTTL3	
Communication Interface	TTL	USB
Max. Baudrate	921.6 Kbit/s	921.6 Kbit/s
Communication Protocol	LP-BUS/ ASCII	LP-BUS/ ASCII
Orientation Range	Roll: $\pm 180^\circ$; Pitch: $\pm 90^\circ$; Yaw: $\pm 180^\circ$	
Size	34×34.5×15.7mm	
Weight	17.6g	
Resolution	0.01°	
Accelerometer	3 axis, $\pm 2 / \pm 4 / \pm 8 / \pm 16$ g, 16bits	
Gyroscope	3 axis, $\pm 125 / \pm 250 / \pm 500 / \pm 1000 / \pm 2000$ dps / ± 4000 dps, 16bits	
Pressure Sensor	300-1100 hPa	
Magnetometer	3 axis, $\pm 2 / \pm 8$ gauss,16bits	
Accuracy	< 0. 5° (Static), < 2° RMS (Dynamic)	
Data Output Format	Raw & Calibrated data, Euler Angle, Quaternion, Linear Acceleration	
Data Output Rate	500 Hz	
Power Consumption	0.017A@12V	
Power Supply	5V ~18V DC	5V DC
Connector	Micro USB-B	DB9 female
Case Material	ABS	
Operation Temperature	-20 to +80 °C (upon request -40 to +80 °C)	
Software & Driver	LpmsControl2 interface software (Windows), Open source sensor driver for Windows and Linux (OpenZen, supports C, C++, Python, C#, Unity, ROS)	

Dimensions

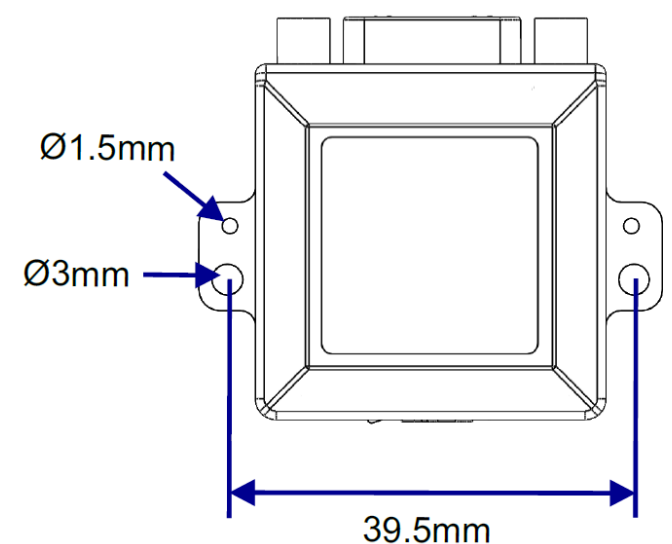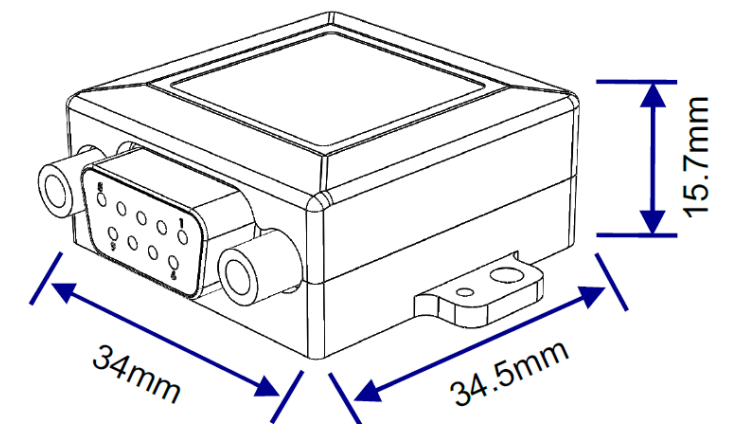

※ Performance parameters are measured at +25°C. Other temperatures may result in varying reference values.

※ Please refer to the product manual for more detailed specifications.

Package

- LPMS-UTTTL3 Sensor× 1
- Cable × 1
- User Guide Card × 1
- Warranty (1 Year)



LpmsControl (Interface Software)

